

# ViewSonic® DIRECT VIEW LED LDS135-153


## Key Features

- Pre-assembled kit ready for instant use
- Foldable screen with the movable flight case for easy delivery
- Shock-proof, dustproof, and moisture-proof through GOB surface treatment
- Built-in stand with motorized height adjustment
- Impressive audio from Harman Kardon speakers



## Product Description

The ViewSonic® LDS135-153 is a foldable 135" All-in-One LED display that boasts instant use, easy delivery, and convenient maintenance, making it an ideal rental-ready solution for events, exhibitions, or any other short-term use. The pre-assembled design and built-in motorized height adjustment stand enable effortless setup within just a few minutes. Delivery convenience is greatly enhanced with the foldable screen design, reducing the packaging size of the movable flight case by nearly 50% compared to the previous generation, thus minimizing shipping costs. Utilizing Glue-on-Board (GOB) surface treatment technology, the IP54-rated LED modules provide enhanced protection against collisions, dust, and moisture during installation and use. With the seamless large screen and superior built-in Harman Kardon speakers, be ready to impress your audience everywhere from high-end boardrooms and receptions to galleries, auditoriums, and other large venues.

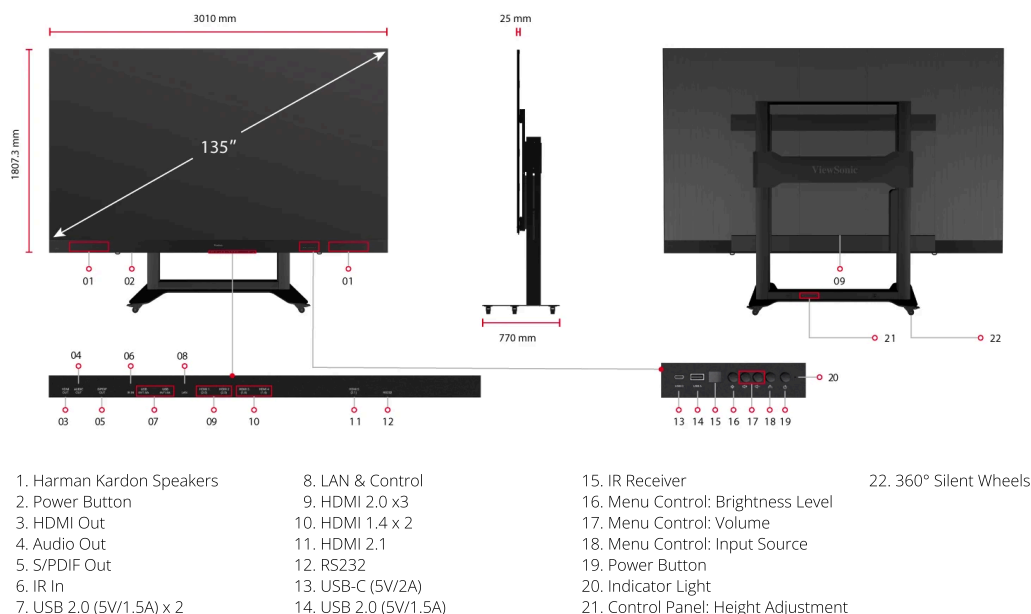

Visit Us

[www.viewsonic.com](http://www.viewsonic.com)

SPECIFICATION

|                        |                                         |
|------------------------|-----------------------------------------|
| Screen Size:           | 135"                                    |
| Display Area (mm):     | 3000 (H) x 1687.5(V)                    |
| Native Resolution:     | 1920x1080                               |
| Panel Technology:      | Direct view LED                         |
| LED Package Type:      | SMD 3 in 1 (GOB)                        |
| Bonding Wire:          | Copper                                  |
| Pixel Pitch (mm):      | 1.56                                    |
| Brightness (max.):     | 600 nits (8 levels adjustable)          |
| Contrast Ratio (typ.): | 6000:1                                  |
| Orientation:           | Landscape                               |
| Viewing Angles (typ.): | H = 170, V = 170                        |
| LED Lifetime (typ.):   | 100,000 Hours                           |
| Local Storage:         | Total 64GB<br>(56GB available storage)  |
| Embedded OS:           | Android 9.0                             |
| Resolution Support:    | VGA(640 x 480) to<br>1080p(1920 x 1080) |

|                       |                                                           |
|-----------------------|-----------------------------------------------------------|
| HDTV Compatibility:   | 480i, 480p, 576i, 576p, 720p,<br>1080i, 1080p, 2160P/60Hz |
| Horizontal Frequency: | 23-120 kHz                                                |
| Vertical Scan Rate:   | 15-135 Hz                                                 |

INPUT

|                        |                                                 |
|------------------------|-------------------------------------------------|
| HDMI:                  | 6<br>(HDMI 2.1 x1, HDMI 2.0 x3,<br>HDMI 1.4 x2) |
| USB Type A:            | 3<br>(USB2.0 x3)                                |
| RJ45 Input (Internet): | 1                                               |
| IR in (3.5mm):         | 1                                               |
| Wi-Fi Input:           | 2.4G/5G Hz                                      |
| USB Type C:            | 1<br>(Video input、 Power output<br>(5V/2A))     |

OUTPUT

|                     |                                             |
|---------------------|---------------------------------------------|
| HDMI out:           | 2<br>(HDMI 2.0 external x1, internal<br>x1) |
| Speaker:            | 20W x2 (Harman Kardon)                      |
| Audio out (3.5mm):  | 1                                           |
| S/PDIF:             | 1                                           |
| USB Type A (Power): | Shared with USB A input<br>(5V/1.5A x3)     |
| USB Type C (Power): | Shared with USB Type C input<br>(5V/2A x1)  |

CONTROL

|                          |                             |
|--------------------------|-----------------------------|
| USB Type A (Services):   | x1(shared with USB A input) |
| RS232 (DB 9-pin female): | 1                           |
| IR Receiver:             | 1                           |

OTHERS

|                             |                                                                      |
|-----------------------------|----------------------------------------------------------------------|
| Power Supply Voltage:       | 100-120V/30A~ 50/60Hz or 220-<br>240V/15A~ 50Hz<br>(vary by country) |
| Power Consumption:          | 1500W (typ), 2500W (max)<br>< 0.5W (Sleep)                           |
| Operating Temperature:      | 0~40°C                                                               |
| Total LED Module Quantity:  | 100                                                                  |
| Ingress Protection Rating:  | IP54(Front)                                                          |
| Impact Protection Rating:   | IK06(Front)                                                          |
| Net Weight:                 | 548.95 lbs<br>(249 kg)                                               |
| Gross Weight:               | 939 lbs<br>(426 kg)                                                  |
| Product Dimensions (WxHxD): | 1800x2022.8x760 mm(min.)<br>3010x2690x760 mm(max.)                   |
| Packing Dimensions (WxHxD): | 74.8x80.79x31.5 inches<br>(1900x2052x800 mm)                         |

STANDARD ACCESSORIES

|                     |               |
|---------------------|---------------|
| Power Cord:         | 1             |
| LAN Cable (Cat 5E): | 1 (5m)        |
| Remote Control:     | 1             |
| QSG:                | 1             |
| Spare Parts:        | LED module x7 |
| Maintenance Tool:   | LD-MK-005 x1  |

OPTIONAL ACCESSORIES

|                   |           |
|-------------------|-----------|
| Maintenance Tool: | LD-MK-005 |
|-------------------|-----------|